

TEC 200
TEC 120

Pianta pali
Pile driving

HYDRASOLIDS



PIANTA PALI TEC 120 - TEC 200

Le macchine piantapali TEC 120 e TEC 200 vengono utilizzate per l'infissione di pali di acciaio di diversi diametri e profili, pali guardrail e pali in legno. Sono montate su sottocarri cingolati ma possono essere installate anche su escavatori o autocarri. Il motore è completamente insonorizzato ed isolato. I martelli pianta-pali, di nostra produzione, sono anch'essi silenziati e dotati di un sistema di antivibranti che attutiscono le sollecitazioni trasmesse alla macchina. Le macchine sono dotate di ralla che consentono l'infissione sia verticalmente che in obliquo e di traslatore torre.

Sono dotate di radio e filo comandi in modo da limitare la presenza dell'operatore vicino alla macchina e sono complete di una serie di dotazioni indispensabili per la sicurezza dell'operatore.

Le macchine vengono completate da una serie di optional a disposizione del cliente e sono progettate in modo da soddisfare diverse tipologie di lavoro.

PILE DRIVING TEC 120 - TEC 200

Machines for pile driving TEC 120 e TEC 200 are used to drive iron piles of different diameters and sections, guardrail and wood piles.

They are mounted on crawler undercarriage but they could be placed on excavators or trucks. Their engine is completely soundproofing and insulated.


Pile-driving hammers of our production are also soundproofing and equipped with a shock absorbing system that reduces the impact stress to the machine. Tec series have a rotation system that allows to drive piles in vertical and oblique way and they have translation mast to move the hammers in every direction.

They are equipped with remote and leads control in way to reduce the operator's work near the machine. Machines have a full optional series that can be mounted at customer discretion and to satisfy every requirements.

TEC 200
TEC 120

Pianta pali
Pile driving

HYDRA
S
I
O
L
I
S
I
P
K
H

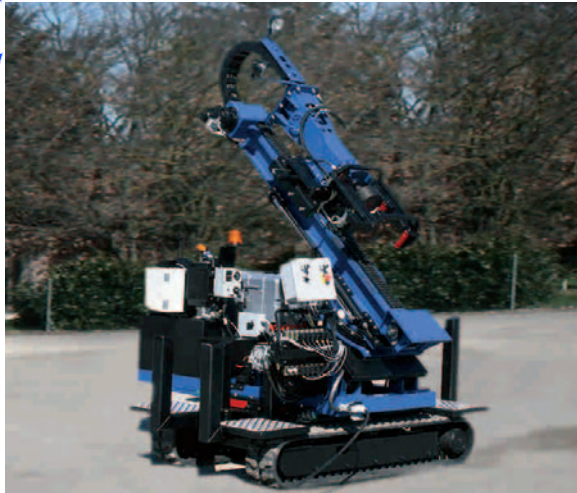

I dati e le immagini descritte in questo catalogo sono puramente indicativi e Hydra si riserva la possibilità di variarli senza preavviso.

The features and photos of that catalogue are merely indicative and Hydra has the possibility to change them without notice.

CARATTERISTICHE TECNICHE / TECHNICAL FEATURES

		TEC 120	TEC 200
Motore	Engine	26,5 Kw	26,5 Kw
Peso	Weight	1450 Kg	1550 Kg
Raffreddamento	Cooling	ad acqua/water cooling	ad acqua/water cooling
Peso martello	Hammer weight	120 Kg	200 Kg
Energia per colpo	Blow energy	210 Joule	490 Joule
Colpi/minuto	Blow per minute	800-1200	600-1250
Capacità serbatoio	Tank capacity	70 lt	70 lt